

STANDARD SPECIFICATIONS: P503CON, P504CON

- Three Phase TEFC Motor 230/3/60, 460/3/60, 500 CFM, 10 Hp and 94" H2O
- Ruwac Exclusive Maxflo Multi-Stage Turbine
- Class II, Division 2 Groups F & G
- Carbon Impregnated Fiberglass Housing
- External Filter Cleaning Mechanism Dustless Cleaning of Filter
- 48 ft² MicroClean Filter 99% Efficient @ 0.5 Microns
- 2.75" Vacuum Inlet with Aluminum Cast Deflector
- Continuous Duty Operation
- 24 Gallon Collection Capacity Removable Dustpan





Contact us today for pricing and availability


413-532-4030

available upgrades:

- HEPA SUPER Maxx Filter
- Dust Extraction Arm
- Pair with Tubing and Fittings for Central Vacuum Capabilities

TWAC INDUSTRIAL VACUUM SOLUTIONS

P503CON, P504CON DIMENSIONAL DRAWINGS

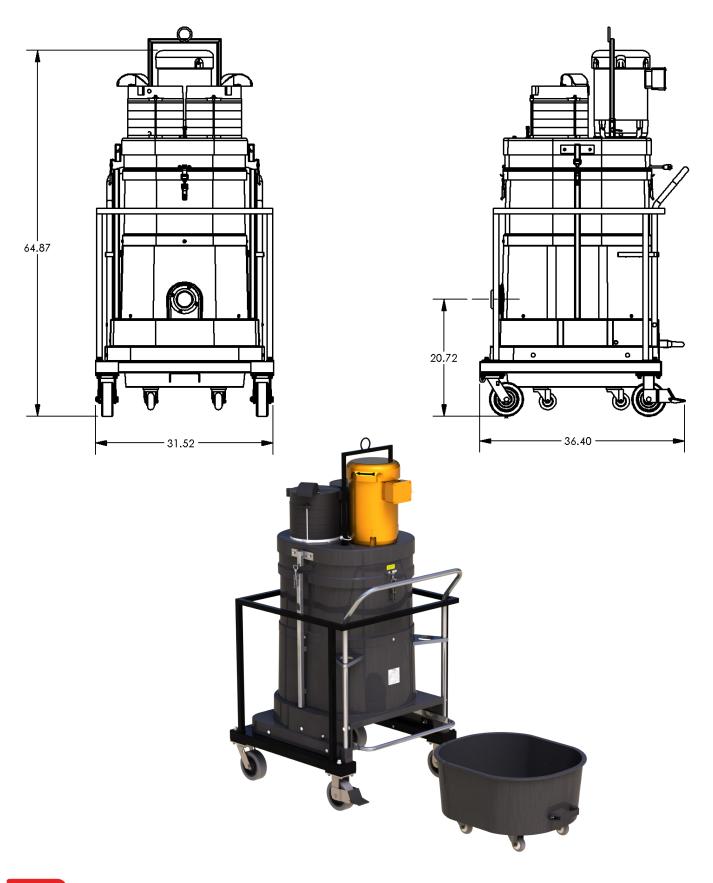

INDUSTRIAL VACUUM SOLUTIONS