

### STANDARD SPECIFICATIONS: RS291

- Three Motor 120/1/60, 290 CFM, 3.2 Hp and 75" H2O
- Compression Cast "BULLETPROOF" Composite Modular Housing
- External Filter Cleaning Mechanism Dustless Cleaning of Filter
- 28 ft<sup>2</sup> MicroClean Filter 99% Efficient @ 0.5 Microns
- 2.75" Vacuum Inlet with Aluminum Cast Deflector
- Intermittent Duty Operation
- 30 Gallon Collection Capacity 30 Gallon Drum
- Silencer kit for Extremely Quiet Operation
- Use up to 50' of Hose





Contact us today for pricing and availability


413-532-4030

### available upgrades:

- HEPA 2.0 Filter
- HEPA Maxx Filter

# TWO INDUSTRIAL VACUUM SOLUTIONS

### RS291 DIMENSIONAL DRAWINGS

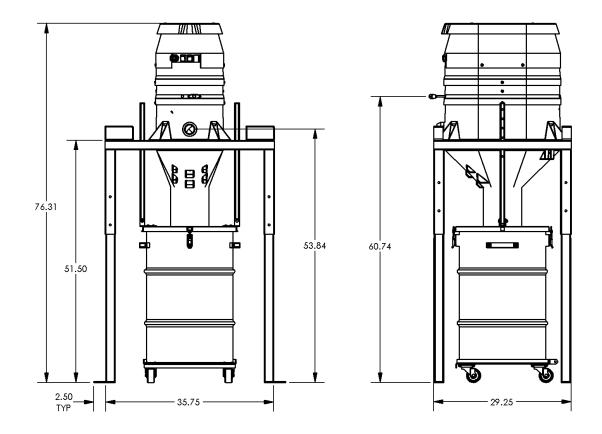



## TWAC INDUSTRIAL VACUUM SOLUTIONS