

STANDARD SPECIFICATIONS: RS352

- Three Motor 240/1/60, 350 CFM, 5 Hp and 91" H2O
- Compression Cast "BULLETPROOF" Composite Modular Housing
- External Filter Cleaning Mechanism Dustless Cleaning of Filter
- 28 ft² MicroClean Filter 99% Efficient @ 0.5 Microns
- 2.75" Vacuum Inlet with Aluminum Cast Deflector
- Intermittent Duty Operation
- 30 Gallon Collection Capacity 30 Gallon Drum
- Silencer kit for Extremely Quiet Operation
- Use up to 50' of Hose





Contact us today for pricing and availability


413-532-4030

available upgrades:

- HEPA 2.0 Filter
- HEPA Maxx Filter

INDUSTRIAL VACUUM SOLUTIONS

RS352 DIMENSIONAL DRAWINGS

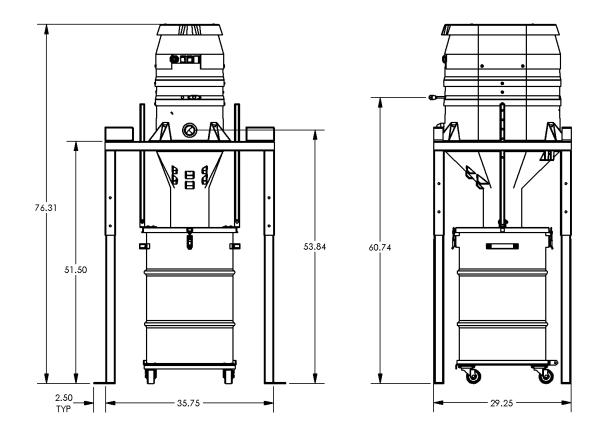



TWO INDUSTRIAL VACUUM SOLUTIONS