CLASS II DIVISION 2 IMMERSION SYSTEM

#### STANDARD SPECIFICATIONS: MX363

- TEFC Motor 230/3/60, 180 CFM, 3 Hp and 78" H2O
- Ruwac Exclusive Maxflo Multi-Stage Turbine
- Class II, Division 2: Groups F & G
- Carbon Impregnated "BULLETPROOF" Compression Cast Housing
- Fully Bonded and Grounded
- 44 ft<sup>2</sup> Hydrophobic Filter 99% Efficient @ 1 Micron
- 2" Vacuum Inlet with Stainless Steel Immersion Tube
- Stainless Steel Demisting Pad and Dispersion Screen
- Continuous Duty Operation
- 12 Gallon Liquid Bath



WET-MIX IMMERSION TECHNOLOGY



Contact us today for pricing and availability


413-532-4030


#### available upgrades:

- HEPA Maxx Filter
- Onboard Reclaim System
- Discharge Settling Chamber

# TWOC INDUSTRIAL VACUUM SOLUTIONS

### MX363 DIMENSIONAL DRAWINGS

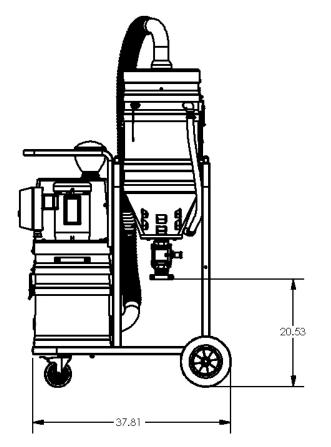

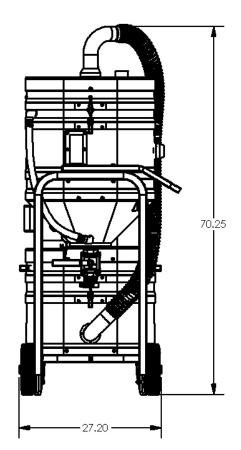



# **INDUSTRIAL VACUUM SOLUTIONS**