

STANDARD SPECIFICATIONS: P293EX, P294EX

- Three Phase TEFC Motor 230/3/60, 460/3/60, 290 CFM, 10 Hp and 111" H2O
- Ruwac Exclusive Maxflo Multi-Stage Turbine
- Class I, Div 1,2 Group D, Class II, Div 1,2 Groups F and G
- ETL Certified to UL 1203 and CSA 22.2
- Fully Conductive Carbon Impregnated Fiberglass Housing
- External Filter Cleaning Mechanism Dustless Cleaning of Filter
- 48 ft² MicroClean Filter 99% Efficient @ 0.5 Microns
- 2.75" Vacuum Inlet with Bronze Deflector
- Continuous Duty Operation
- 24 Gallon Collection Capacity Removable Dustpan



CERTIFIED EXP. PROOF



Contact us today for pricing and availability


413-532-4030


available upgrades:

- HEPA SUPER Maxx Filter
- Dust Extraction Arm
- Pair with Tubing and Fittings for Central Vacuum Capabilities

TWO INDUSTRIAL VACUUM SOLUTIONS

P293EX, P294EX DIMENSIONAL DRAWINGS

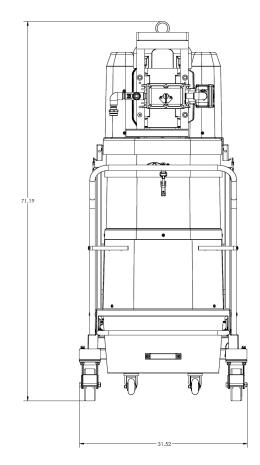

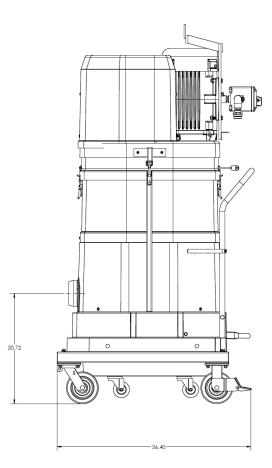



Twac INDUSTRIAL VACUUM SOLUTIONS