

STANDARD SPECIFICATIONS: W155EX

- Air Powered Single Venturi Motor Design 136" H2O
- Ruwac Exclusive Multi-Stage Maxflo Turbine
- NFPA 652 and 654 Compliant Includes 25' Grounding Reel
- Class I, Div 1,2 (Group B,C,D); Class II, Div 1,2 (Group E,F,G)
- Fully Conductive, Carbon Impregnated "BULLETPROOF" Composite Housing
- External Filter Cleaning Mechanism Dustless Cleaning of Filter
- 13 ft² MicroClean Filter 99% Efficient @ 0.5 Microns
- 2" Vacuum Inlet with Bronze Deflector
- Continuous Duty Operation
- 9 Gallon Collection Capacity Removable Dustpan





Contact us today for pricing and availability


413-532-4030


available upgrades:

- HEPA Maxx Filter & ULPA filtration
- 32" Floor Sweep
- Dust Extraction Swing Arm

TWOC INDUSTRIAL VACUUM SOLUTIONS

W155EX DIMENSIONAL DRAWINGS

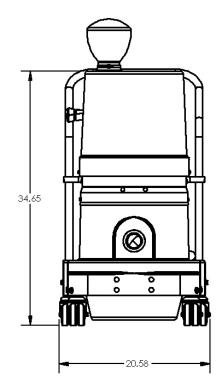

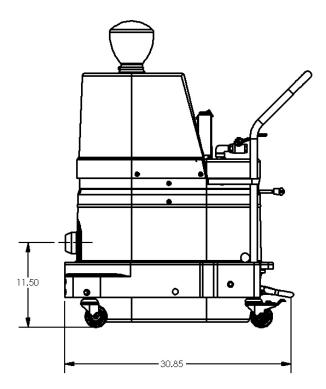



Twac INDUSTRIAL VACUUM SOLUTIONS