

STANDARD SPECIFICATIONS: W285EX

- Air Powered Dual Venturi Motor Design 217" H2O
- Ruwac Exclusive Multi-Stage Maxflo Turbine
- NFPA 652 and 654 Compliant Includes 25' Grounding Reel
- Class I, Div 1,2 (Group B,C,D); Class II, Div 1,2 (Group E,F,G)
- Fully Conductive, Carbon Impregnated **BULLETPROOF** Composite Housing
- External Filter Cleaning Mechanism Dustless Cleaning of Filter
- 28 ft² MicroClean Filter 99% Efficient @ 0.5 Microns
- 2.75" Vacuum Inlet with Bronze Deflector
- Continuous Duty Operation
- 9 Gallon Collection Capacity Removable Dustpan





Contact us today for pricing and availability

available upgrades:


- HEPA Maxx Filter & ULPA filtration
- 32" Floor Sweep
- Dust Extraction Swing Arm




ITUWOC INDUSTRIAL VACUUM SOLUTIONS

W285EX

DIMENSIONAL DRAWINGS

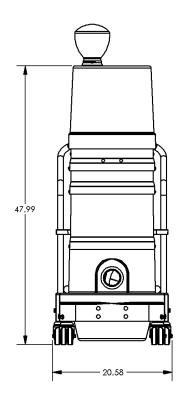

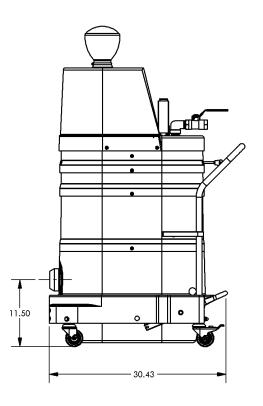





TOWAC INDUSTRIAL VACUUM SOLUTIONS