CLASS II DIVISION 2 IMMERSION SYSTEM

IMMERSION

STANDARD SPECIFICATIONS: MX302

- TEFC Motor 240/1/60, 150 CFM, 1.5 Hp and 75" H2O
- Ruwac Exclusive Maxflo Multi-Stage Turbine
- Class II, Division 2 Groups F & G
- Carbon Impregnated "BULLETPROOF" Compression Cast Housing Fully Bonded & Grounded
- 44 ft² Hydrophobic Filter 99% Efficient @ 1 Micron
- 2" Vacuum Inlet with Stainless Steel Immersion Tube
- Stainless Steel Demisting Pad and Dispersion Screen
- Continuous Duty Operation
- 9 Gallon Liquid Bath





Contact us today for pricing and availability


413-532-4030

available upgrades:

• HEPA Maxx Filter

TWOC INDUSTRIAL VACUUM SOLUTIONS

MX302 DIMENSIONAL DRAWINGS

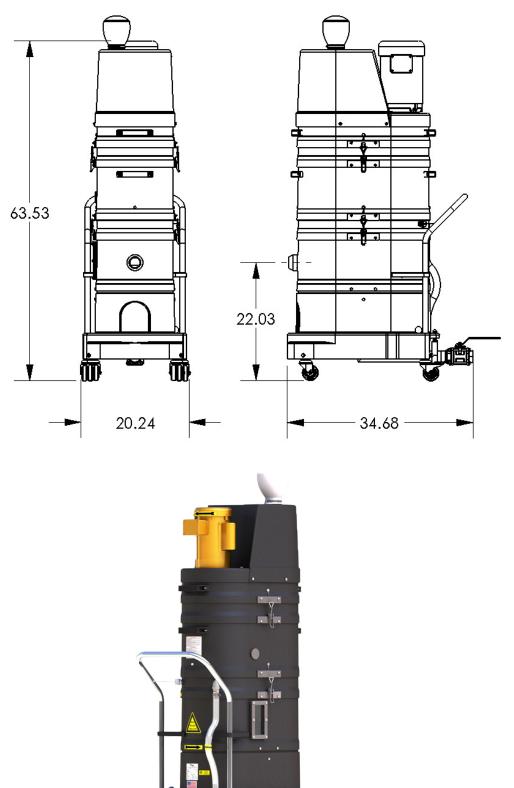

Twac INDUSTRIAL VACUUM SOLUTIONS