CLASS II DIVISION 2 IMMERSION SYSTEM

## STANDARD SPECIFICATIONS: MX303

- Three Phase TEFC Motor 230/3/60, 180 CFM, 3 Hp and 78" H2O
- Ruwac Exclusive Maxflo Multi-Stage Turbine
- Class II, Division 2 Groups F & G
- Carbon Impregnated "BULLETPROOF" Compression Cast Housing Fully Bonded & Grounded
- 44 ft<sup>2</sup> Hydrophobic Filter 99% Efficient @ 1 Micron
- 2" Vacuum Inlet with Stainless Steel Immersion Tube
- Stainless Steel Demisting Pad and Dispersion Screen
- Continuous Duty Operation
- 9 Gallon Liquid Bath





Contact us today for pricing and availability


413-532-4030

available upgrades:

• HEPA Maxx Filter

## Twac INDUSTRIAL VACUUM SOLUTIONS

## MX303 DIMENSIONAL DRAWINGS

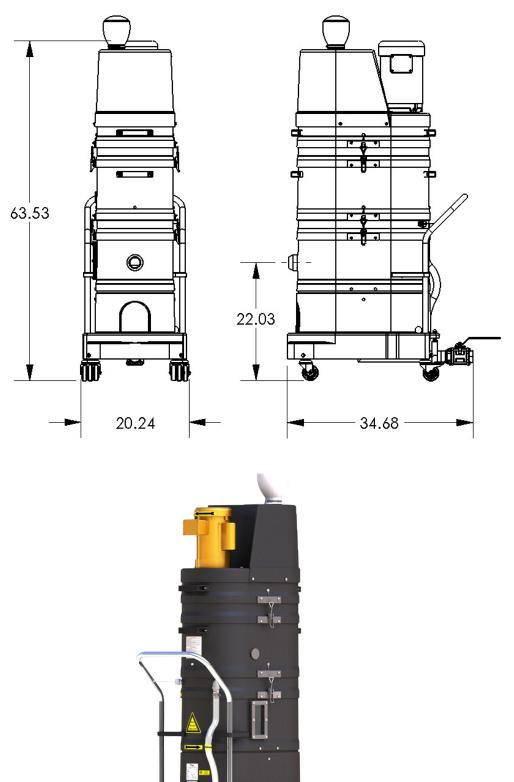

## Twac INDUSTRIAL VACUUM SOLUTIONS