

STANDARD SPECIFICATIONS: W293, W294

- Three Phase TEFC Motor 230/3/60, 460/3/60, 290 CFM, 10 Hp and 111" H2O
- Ruwac Exclusive Multi-stage Maxflo Turbine 15,000 Hour run Time
- Class II, Division 2 Compliant Groups F & G
- Fully Conductive, Carbon Impregnated **"BULLETPROOF"** Composite Housing
- External Filter Cleaning Mechanism Dustless Cleaning of Filter
- 28 ft² MicroClean Filter 99% Efficient @ 0.5 Microns
- 2.75" Vacuum Inlet with Aluminum Cast Deflector
- Continuous Duty Operation
- 9 Gallon Collection Capacity Removable Dustpan





Contact us today for pricing and availability


413-532-4030


available upgrades:

- HEPA Maxx Filter
- 32" Floor Sweep
- Dust Extraction Arm

TWAC INDUSTRIAL VACUUM SOLUTIONS

W293, W294 DIMENSIONAL DRAWINGS

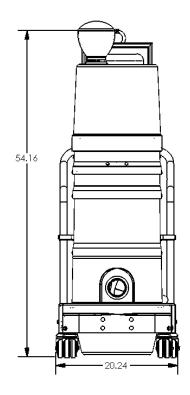

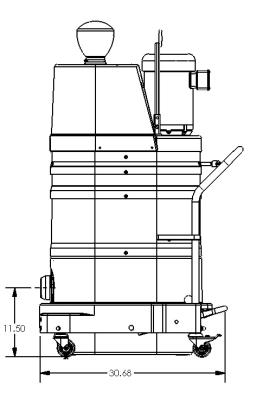



INDUSTRIAL VACUUM SOLUTIONS